

Global LEAP Awards

2020 Buyer's Guide for Electric Pressure Cookers



The Global LEAP Awards Buyer's Guide

The Global LEAP Awards Buyer's Guide is a catalog of the world's best-in-class appliances for off- and weak-grid environments. The 2020 Global LEAP Awards Electric Pressure Cookers competition was implemented by CLASP in partnership with the Modern Energy Cooking Services (MECS) program, and funded by UK aid. This edition contains information about electric pressure cookers named Winners and Finalists based on laboratory testing in the 2020 Global LEAP Awards Electric Pressure Cooker Competition.

The Buyer's Guide serves as a procurement tool for distributed energy service companies and appliance distributors, and provides general market intelligence to other interested stakeholders. It includes rated product specifications, performance metrics based on laboratory testing, and sales contact information. The Global LEAP Awards identifies one Winner within each size category as the best overall product, with other high-quality products within the same category identified as Finalists. Overall, the Global LEAP Awards lists thirteen electric pressure cookers in the 2020 Buyer's Guide designed for use in households and micro-enterprises served by off-grid energy systems, unreliable grid connections, and renewable mini-grids.

The Global LEAP Awards

The Global LEAP Awards – an initiative of the Efficiency for Access Coalition – is an international competition that identifies and promotes the world's best, most energy-efficient off-and weak-grid appliances. High-quality, energy-efficient appliance products ensure that un- and under-electrified households and businesses can make the most out of their available energy supply. The Global LEAP Awards incentivize innovation and send clear and actionable market signals about appliance quality, energy efficiency, appropriateness of design, and functionality.

All Global LEAP Awards Winners and Finalists undergo testing in third-party laboratories and expert evaluation for their energy performance, quality, and reliability. The products recognized by the Global LEAP Awards offer a strong balance of price, energy efficiency, performance, and quality.

Contents

- 2 Competition Overview
- 4 Electric Pressure Cooker Testing Process
- 5 Explanation of Information Included for Each Product

SMALL AC POWER

- | | |
|------------------------|----------|
| 6 Solageo SOL-EPC-25L | WINNER |
| 7 Instant Pot DUO MINI | FINALIST |
| 8 SUPOR 30YC26 | FINALIST |

MEDIUM AC POWER

- | | |
|--------------------------|----------|
| 9 SESCOM MY-CJ6001W | WINNER |
| 10 Aufla ASC 4L | FINALIST |
| 11 Aufla ASC 5L | FINALIST |
| 12 VON VSCP60MMX | FINALIST |
| 13 NESELTEC S1578 | FINALIST |
| 14 Sayona SPC 100 | FINALIST |
| 15 Instant Pot DUO 60 V3 | FINALIST |

LARGE AC POWER

- | | |
|-----------------------------|----------|
| 16 Instant Pot DUO 80 V2 | WINNER |
| 17 Instant Pot DUO NOVA 100 | FINALIST |
| 18 BURN MY-8001 | FINALIST |
-

- 19 Acknowledgements

DISCLAIMER

The Global LEAP Awards, and associated partners and agents make no claims and warranties about the safety, quality, energy performance, or off-grid appropriateness of any product. The product is provided and listed "as is" without warranty of any kind, whether express, implied, statutory, or otherwise. Global LEAP Awards Program and CLASP bear no liability for any damages resulting from use (or attempted use) of the product. The inclusion in this Guide of a manufacturer's product should not be construed as an endorsement of that manufacturer or of its entire product line, nor of the product safety. Global LEAP made every effort to provide transparent and accurate testing results for the product performance metrics included in the Buyer's Guide. The performance data included here is the result of testing randomly selected product samples at ISO/IEC-accredited test laboratories. Product performance may vary based on different product configuration, test environments or other factors.

Products were tested in "as shipped" mode. Data used in the Buyer's Guide should only serve as an indication of product performance. Bulk purchasers considering appliance products are strongly encouraged to request detailed test results from manufacturers and/or conduct independent testing. For guidance on how to interpret the data included here, or on identifying appropriate test laboratories and test methods, please contact Global LEAP.

The Importance of Off-Grid Appliance Quality Assurance

Confidence in product quality is essential to the development of weak- and off-grid appliance markets. As these markets grow, the threat of low-quality, inefficient products eroding consumer confidence grows with it, as stories of experiences with inferior products can spread quickly.

For many bottom-of-the-pyramid consumers, purchasing appliances is a major decision and investment. Spending limited funds on a poor-quality product can also be devastating for the consumer and harm the reputation of weak- and off-grid products generally.

By prioritizing the quality of weak- and off-grid products, the Global LEAP Awards builds a competitive global market where high-performing products help consumers unlock the full range of benefits that stem from having access to modern energy services.

The 2020 Global LEAP Awards Electric Pressure Cooker Competition

Three billion people around the world depend on food cooked over open fires or inefficient stoves that generate dangerous levels of air pollution. Exposure to this household air pollution from burning wood, charcoal, coal and kerosene is a leading risk factor for diseases. Furthermore, emissions from household cooking are a significant source of ambient air pollution and a major contributor to climate change.

Electric pressure cooking provides a wide range of benefits, from reducing carbon emissions and personal exposure to harmful pollutants, to lowering the burden of disease associated with household air pollution. Electric pressure cookers (EPCs), however, are one of the most challenging appliances to design and develop to be both energy efficient, cost-effective, and high functioning to meet individual needs and cooking preferences in weak- and off-grid environments.

The 2020 Global LEAP Awards was the first-ever competition for appropriately designed, highly energy efficient electric pressure cookers suitable for use in weak- and off-grid settings. Figure 1 shows some of the energy saving and safety mechanisms that make EPCs suitable for weak- and off-grid use.

This Buyer's Guide presents a selection of laboratory test results that will help weak- and off-grid market

stakeholders better understand the drivers of EPC performance, as well as compare the performance of different EPCs across three size categories (Table 1). Winner and Finalist EPCs are grouped into three categories based on their capacity (i.e., volume of the internal cooking pot). *Note that only two DC units were nominated to the 2020 competition and neither qualified as Finalists – therefore there are no DC models in this Buyer's Guide.*

Table 1: EPC size categories

	Capacity		
	1 - 3L	4 - 6L	7 - 9L
AC	Small AC	Medium AC	Large AC

The Global LEAP Awards uses a combination of objective and subjective metrics to determine winners in every category. The relative balance of these metrics rewards products that address key technical challenges and end user needs. For EPCs, the evaluation criteria used to determine Winners in each category included:

- **Energy performance**, such as energy consumption and energy efficiency;
- **Service delivery**, which is a measure the product's ability to cook well, consistently, and timely;
- **Affordability**, a combination of up-front and operating costs to an end user;
- **Safety** of operating the product;
- **Quality** of the product's design and construction;
- **Suitability** for use in weak- and off-grid settings.

The 2020 Awards also included two innovation prizes in addition to the three category Winners. The prizes were awarded to two products based on their design and performance in critical areas that represent risks to market adoption: affordability and energy performance.

- The **Affordability Prize** was awarded to the product that provided the best overall value to end users based on the unit price, estimated operating costs, overall performance, and cooking capacity. The BURN MY-8001 model from BURN Manufacturing Co. won this prize.
- The **Energy Performance Prize** was awarded to the product that provided the best energy performance, which reflects low total energy consumption and high energy efficiency. The Aufla 5L model from Atvantic Electronics Pvt Ltd. won this prize.

\$50,000 cash prizes were awarded to each of the companies that nominated these two products.

The Global LEAP Awards Electric Pressure Cooker Testing Process


The goal of Global LEAP Awards testing is to enable objective assessment and comparison of critical product performance metrics. To the extent possible, all Global LEAP test methods reference existing industry standard test methods, with minor modifications as necessary based on input from international experts. Details about the [Global LEAP Electric Pressure Cooker Test Method](#) are available online.

The Global LEAP Awards EPC testing process included 1) thorough visual screenings to evaluate product quality, workmanship, and some safety elements; 2) simulated cooking tests with water to measure energy performance and service delivery; and 3) stress tests to evaluate safety features and suitability for use in weak- and off-grid settings.

The safety testing included tests for control and safety devices (that prevent the product from over-pressurizing or opening while pressurized), general circuitry and wiring durability, external temperature hazards, and stability (i.e. resistance to tipping). *Note that the Global LEAP Awards does not endorse or guarantee the safety of the products in this Buyer's Guide.*

All the test results in this Buyer's Guide were from tests performed in Fort Collins, Colorado in the United States at an altitude around 5,000 feet above sea level, which may impact the values. Therefore, these results may differ at sea level or other altitudes. In addition, the simulated cooking tests were performed with water filled to 50% of the cooking pot capacity. Actual performance and cooking quality may differ depending on the type and density of the food items (i.e. liquid or solid).

Figure 1: Electric Pressure Cooker Features

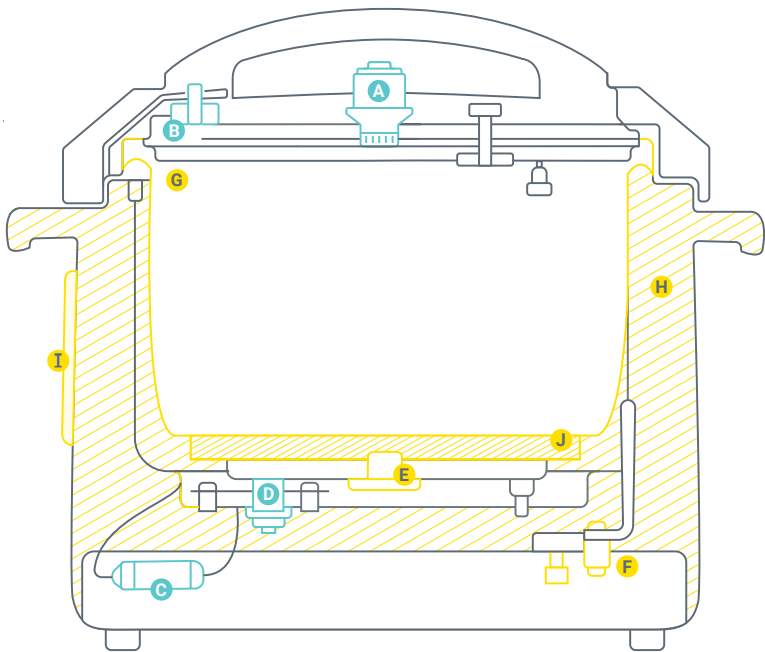

Safety Features

- A Pressure Release Valve:** Automatically opens when pressure exceeds normal levels.
- B Locking Pin:** Prevents lid from being opened when pressurized.
- C Thermal Fuse:** Cuts power when temperature above expected.
- D Secondary Pressure Relief Valve:** Automatically opens if pressure sensor & pressure release valve both fail.

Energy Saving Mechanisms

- E Temperature Sensor:** Cuts power when operating temperature is reached.
- F Pressure Sensor:** Cuts power when operating pressure is reached.
- G Pressurizing Seal:** Enables food to cook in half the time by raising the boiling point of water.
- H Insulation:** Insulation around both pot and heating element to prevent heat escaping.
- I Interface:** Control mechanism to allow user to automatically turn off EPC after cooking time has elapsed. Two types: analogue/dial and digital button
- J Hot Plate:** Standard resistive heating element sized to perfectly fit the pot.



EXPLANATION OF INFORMATION INCLUDED FOR EACH PRODUCT

Capacity	Total volume of the cooking pot, declared by the nominating company.
Nominal voltage & frequency	Safe operating voltage range and frequency, declared by the nominating company.
Heating Phase	EPC performance during laboratory testing from the turning on pressure cooking mode until, through heating phase, until pressure cooking phase begins. Product was filled with water to 50% of pot capacity and set to high-pressure cooking mode.
Total energy consumption (Wh)	Energy consumed by the product during the heating phase.
Average power draw (W)	Average power drawn by the product during the heating phase.
Thermal efficiency (from 30-90°C)	Efficiency of converting electrical energy into heat, measured in the cooking water from 30-90°C during the heating phase.
Temperature: Max (°C)	Maximum temperature of the steam/water inside the pot during the heating phase.
Time to reach pressure cooking phase (min:sec)	Time required for the product to reach pressure cooking phase.
Pressure Cooking	EPC performance during a 30-minute laboratory test, measured once the device was pressurized. Product was filled with water to 50% of pot capacity and set to high-pressure cooking mode.
Total energy consumption (for 30 min, Wh)	Energy consumed by the product during the pressure cooking phase.
Average power draw (W)	Average power drawn by the product during the pressure cooking phase.
Temperature: Max, Min, Ave (°C)	Maximum, minimum, and average temperature of the steam/water inside the cooking pot during the pressure cooking phase.
Pressure: Max, Min, Ave (kPa)	Maximum, minimum, and average pressure inside the cooking pot during the pressure cooking phase.
Sauté Cooking	EPC performance during a 30-minute laboratory test. Product was filled with vegetable oil to depth of 2 cm and set to sauté mode (or high-pressure cooking mode if no sauté mode) with the lid off.
Calculated total energy consumption (for 30 min, Wh)	Energy consumed by the product during the sauté cooking phase as calculated by the average power draw during the 30-minute test.
Average power draw (W)	Average power drawn by the product during the sauté cooking phase.
Temperature: Max, Min, Ave (°C)	Maximum, minimum, and average temperature of the oil inside the cooking pot during the sauté cooking phase.
Temperature stability (% time in ideal range)	Percentage of time that the oil temperature was between 140-180°C (ideal sauté cooking temperature boundaries).
Time to reach sauté temperature (min:sec)	Time required for the oil to reach steady-state sauté cooking phase (note: not all products reached 140°C minimum effective temperature required for sauté cooking).
Affordability	
Unit price (index \$ - \$\$\$\$)*	An product price index relative to other products in the same category. The index is expressed in \$ to \$\$\$\$ where \$ means the product's unit price is in the least expensive tier, and \$\$\$\$ the most expensive tier.
Estimated annual operating cost (at USD\$0.20/kWh)	Estimated end user costs to cook 365 meals, based on energy consumed for heating, 30-min pressure cooking, and 30-min sauté cooking per meal, at an estimated energy tariff of USD\$0.20/kWh.

Relevant test method factors that impact results:

- Testing was performed according to the Global LEAP EPC Test Method
- All tests were performed in Fort Collins, CO in 2020 at an altitude around 5,000 feet above sea level
- Simulated pressure cooking tests were performed with water filled to 50% of the cooking pot capacity
- Simulated sauté cooking tests were performed with vegetable oil to depth of 2 cm and set to sauté mode (or high-pressure cooking mode if no sauté mode) with the lid off
- The heating and pressure cooking phase tests were performed using the "high pressure" cooking mode for each product

* The price index represents the product's FOB price relative to the category's average FOB price:

- \$\$\$\$: >30% more expensive than average
- \$\$\$: <30% more expensive than average
- \$\$: <30% less expensive than average
- \$: >30% less expensive than average

Solageo SOL-EPC-25L

Small AC Power



SPECIFICATIONS

Capacity (L)	2.5
Nominal Voltage & Frequency (V / Hz)	220-240 Vac; 50 / 60 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	172.7
	Average Power Draw (W)	602.4
	Thermal Efficiency (from 30-90°C)	74.7%
	Temperature: Max (°C)	111.3
	Time to Reach Pressure Cooking Phase (min:sec)	18:37
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	25.0
	Average Power Draw (W)	50.0
	Temperature: Max / Min / Ave (°C)	111.3 / 103.4 / 106.9
	Pressure: Max / Min / Ave (kPa)	64 / 29.1 / 43.6
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	138.9
	Average Power Draw (W)	277.8
	Temperature: Max / Min / Ave (°C)	199.3 / 164.6 / 183.1
	Temperature Stability (% time in ideal range)	37
	Time to Reach Sauté Temperature (min:sec)	07:52
Affordability	Unit Price (\$-\$\$\$\$)	\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$24.57



Company	Solageo
Sales Contact	Joseph Fernandez
Phone	+ 852-9185-1610
Email	contact@solageo.com
Website	http://www.solageo.com

Instant Pot DUO MINI

Small AC Power

FINALIST

SPECIFICATIONS

Capacity (L)	2.8
Nominal Voltage & Frequency (V / Hz)	120 Vac / 60 Hz*
*220-240V / 50Hz also available	



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	214.4
	Average Power Draw (W)	675.7
	Thermal Efficiency (from 30-90°C)	70.9%
	Temperature: Max (°C)	114.1
	Time to Reach Pressure Cooking Phase (min:sec)	21:41
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	18.9
	Average Power Draw (W)	37.7
	Temperature: Max / Min / Ave (°C)	114.1 / 105.9 / 109.3
	Pressure: Max / Min / Ave (kPa)	78.1 / 39.3 / 54.1
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	135.9
	Average Power Draw (W)	271.8
	Temperature: Max / Min / Ave (°C)	171.3 / 150.4 / 166.6
	Temperature Stability (% time in ideal range)	100
	Time to Reach Sauté Temperature (min:sec)	09:24
Affordability	Unit Price (\$-\$\$\$\$)	\$\$\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$26.95

Instant Pot®

Company Spindel (PTY) LTD
Sales Contact Paul Dimaio
Phone + 27832330518
Email info@instantpot.co.za
Website Instantpot.co.za

Supor 30YC26

Small AC Power

FINALIST



SPECIFICATIONS

Capacity (L)	3
Nominal Voltage & Frequency (V / Hz)	220 Vac / 60 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	233.5
	Average Power Draw (W)	708.0
	Thermal Efficiency (from 30-90°C)	74.3%
	Temperature: Max (°C)	116.7
	Time to Reach Pressure Cooking Phase (min:sec)	23:47
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	21.9
	Average Power Draw (W)	43.9
	Temperature: Max / Min / Ave (°C)	116.7 / 108.8 / 111.3
	Pressure: Max / Min / Ave (kPa)	92.5 / 52.2 / 64.1
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	147.8
	Average Power Draw (W)	295.5
	Temperature: Max / Min / Ave (°C)	179.5 / 147.4 / 172.4
	Temperature Stability (% time in ideal range)	100
	Time to Reach Sauté Temperature (min:sec)	07:50
Affordability	Unit Price (\$-\$\$\$\$)	\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$29.44

SUPOR

Company ZheJiang ShaoXing Supor Domestic
Electrical Appliance Co., Ltd
Sales Contact Joane Huang
Phone +86 0575 8822 3907
Email HDjun@supor.com
Website www.supor.com.cn

SESCOM MY-CJ6001W

Medium AC Power

WINNER

SPECIFICATIONS

Capacity (L)	6
Nominal Voltage & Frequency (V / Hz)	230 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	400.9
	Average Power Draw (W)	984.4
	Thermal Efficiency (from 30-90°C)	80.5%
	Temperature: Max (°C)	112.4
	Time to Reach Pressure Cooking Phase (min:sec)	26:22
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	27.4
	Average Power Draw (W)	54.7
	Temperature: Max / Min / Ave (°C)	112.4 / 104.7 / 107.8
	Pressure: Max / Min / Ave (kPa)	69.2 / 34 / 47.1
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	170.0
	Average Power Draw (W)	340.0
	Temperature: Max / Min / Ave (°C)	154 / 110.2 / 144.5
	Temperature Stability (% time in ideal range)	77
	Time to Reach Sauté Temperature (min:sec)	05:50
Affordability	Unit Price (\$-\$\$\$\$)	\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$43.67



Company Sustainable Energy Services Company Ltd (SESCOM)

Sales Contact Shukuru Meena

Phone +255 738201498

Email sescomtanzania@gmail.com,
energy@sescom.co.tz

Website www.sescom.co.tz

Aufla ASC 4L

Medium AC Power

FINALIST



SPECIFICATIONS

Capacity (L)	4
Nominal Voltage & Frequency (V / Hz)	230 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	258.9
	Average Power Draw (W)	755.6
	Thermal Efficiency (from 30-90°C)	84.0%
	Temperature: Max (°C)	109.2
	Time to Reach Pressure Cooking Phase (min:sec)	21:36
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	28.2
	Average Power Draw (W)	56.4
	Temperature: Max / Min / Ave (°C)	109.2 / 105.2 / 106.7
	Pressure: Max / Min / Ave (kPa)	53.9 / 36.4 / 42.9
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	149.3
	Average Power Draw (W)	298.7
	Temperature: Max / Min / Ave (°C)	178.2 / 125.6 / 163.6
	Temperature Stability (% time in ideal range)	96
	Time to Reach Sauté Temperature (min:sec)	06:39
Affordability	Unit Price (\$-\$\$\$\$)	\$\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$31.86

Aufla ASC 5L

Medium AC Power

FINALIST

SPECIFICATIONS

Capacity (L)	5
Nominal Voltage & Frequency (V / Hz)	230 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	324.1
	Average Power Draw (W)	903.8
	Thermal Efficiency (from 30-90°C)	86.6%
	Temperature: Max (°C)	111.2
	Time to Reach Pressure Cooking Phase (min:sec)	22:53
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	23.5
	Average Power Draw (W)	47.0
	Temperature: Max / Min / Ave (°C)	111.2 / 106.5 / 108.4
	Pressure: Max / Min / Ave (kPa)	63.9 / 42.2 / 50.6
	Calculated Total Energy Consumption (for 20 min; Wh)	183.8
Sauté Cooking	Average Power Draw (W)	367.5
	Temperature: Max / Min / Ave (°C)	186.4 / 146.2 / 177.5
	Temperature Stability (% time in ideal range)	54
	Time to Reach Sauté Temperature (min:sec)	06:54
	Unit Price (\$-\$\$\$\$)	\$\$\$
Affordability	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$38.79



Energy Performance Prize Winner

Company: Atvantic Electronics Pvt Ltd
 Sales Contact: Yash Parmar
 Phone: 919850400066
 Email: yashparmar@aufla.in
 Website: Aufla.in

VON VSCP60MMX

Medium AC Power

FINALIST



SPECIFICATIONS

Capacity (L)	6
Nominal Voltage & Frequency (V / Hz)	230 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	407.8
	Average Power Draw (W)	983.1
	Thermal Efficiency (from 30-90°C)	78.9%
	Temperature: Max (°C)	113.4
	Time to Reach Pressure Cooking Phase (min:sec)	26:18
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	24.0
	Average Power Draw (W)	47.9
	Temperature: Max / Min / Ave (°C)	113.4 / 104.7 / 108.4
	Pressure: Max / Min / Ave (kPa)	75 / 34.5 / 50.6
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	199.3
	Average Power Draw (W)	398.5
	Temperature: Max / Min / Ave (°C)	168.8 / 146.4 / 163.6
	Temperature Stability (% time in ideal range)	100
	Time to Reach Sauté Temperature (min:sec)	08:30
Affordability	Unit Price (\$-\$\$\$\$)	\$\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$46.07

Hotpoint
APPLIANCES LTD

Company Hotpoint Appliance Ltd
Sales Contact Naomi Kabena
Phone 020 3699000/254723740860
Email naomi@hotpoint.co.ke
Website <https://hotpoint.co.ke/>

NESELTEC S1578

Medium AC Power

FINALIST

SPECIFICATIONS

Capacity (L)	6
Nominal Voltage & Frequency (V / Hz)	220 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	409.5
	Average Power Draw (W)	1014.8
	Thermal Efficiency (from 30-90°C)	78.2%
	Temperature: Max (°C)	113.5
	Time to Reach Pressure Cooking Phase (min:sec)	26:39
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	47.2
	Average Power Draw (W)	94.5
	Temperature: Max / Min / Ave (°C)	113.5 / 111.5 / 112.9
	Pressure: Max / Min / Ave (kPa)	74.7 / 64.7 / 71.6
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	189.6
	Average Power Draw (W)	379.3
	Temperature: Max / Min / Ave (°C)	157.1 / 138.6 / 148.8
	Temperature Stability (% time in ideal range)	93
	Time to Reach Sauté Temperature (min:sec)	06:42
Affordability	Unit Price (\$-\$\$\$\$)	\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$47.19



Company NESELTEC LTD
Sales Contact Aloys NTIHEMUKA
Phone + 250788830748
Email ntihemuka@engineer.com
Website www.Neseltec.Energy

Sayona SPC 100

Medium AC Power

FINALIST



SPECIFICATIONS

Capacity (L)	6
Nominal Voltage & Frequency (V / Hz)	230 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	396.5
	Average Power Draw (W)	1033.3
	Thermal Efficiency (from 30-90°C)	79.3%
	Temperature: Max (°C)	113.1
	Time to Reach Pressure Cooking Phase (min:sec)	24:07
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	46.4
	Average Power Draw (W)	92.9
	Temperature: Max / Min / Ave (°C)	113.1 / 107.9 / 110.8
	Pressure: Max / Min / Ave (kPa)	73.5 / 48.2 / 61.5
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	236.5
	Average Power Draw (W)	472.9
	Temperature: Max / Min / Ave (°C)	198.6 / 157.9 / 178.6
	Temperature Stability (% time in ideal range)	53
	Time to Reach Sauté Temperature (min:sec)	07:42
Affordability	Unit Price (\$-\$\$\$\$)	\$\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$49.60



Company SCODE
 Sales Contact John Maina
 Phone +0723767265
 Email johnmaina@score.co.ke
 Website www.score.co.ke

Instant Pot DUO 60 V3

FINALIST

Medium AC Power

SPECIFICATIONS

Capacity (L)	5.7
Nominal Voltage & Frequency (V / Hz)	120 Vac / 60 Hz*
*220-240V / 50Hz also available	



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	389.9
	Average Power Draw (W)	969.2
	Thermal Efficiency (from 30-90°C)	80.8%
	Temperature: Max (°C)	109.1
	Time to Reach Pressure Cooking Phase (min:sec)	26:29
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	27.2
	Average Power Draw (W)	54.5
	Temperature: Max / Min / Ave (°C)	109.1 / 103.2 / 106
	Pressure: Max / Min / Ave (kPa)	53.5 / 28 / 39.4
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	176.5
	Average Power Draw (W)	353.1
	Temperature: Max / Min / Ave (°C)	168.8 / 140.9 / 163
	Temperature Stability (% time in ideal range)	100
	Time to Reach Sauté Temperature (min:sec)	08:27
Affordability	Unit Price (\$-\$\$\$\$)	\$\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$43.34

Instant Pot

Company Spindel (PTY) LTD
Sales Contact Paul Dimaio
Phone + 27832330518
Email info@instantpot.co.za
Website Instantpot.co.za

Instant Pot DUO 80 V2

Large AC Power



SPECIFICATIONS

Capacity (L)	7.6
Nominal Voltage & Frequency (V / Hz)	120 Vac / 60 Hz*

*220-240V / 50Hz also available



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	541.0
	Average Power Draw (W)	1161.1
	Thermal Efficiency (from 30-90°C)	82.1%
	Temperature: Max (°C)	115.7
	Time to Reach Pressure Cooking Phase (min:sec)	30:08
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	19.9
	Average Power Draw (W)	39.9
	Temperature: Max / Min / Ave (°C)	115.7 / 108.3 / 111.1
	Pressure: Max / Min / Ave (kPa)	86.7 / 49.4 / 62.6
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	207.2
	Average Power Draw (W)	414.4
	Temperature: Max / Min / Ave (°C)	170.1 / 137.8 / 163.8
	Temperature Stability (% time in ideal range)	99
Affordability	Time to Reach Sauté Temperature (min:sec)	08:55
	Unit Price (\$-\$\$\$\$)	\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$56.07

Instant Pot

Company Spindel (PTY) LTD
Sales Contact Paul Dimaio
Phone + 27832330518
Email info@instantpot.co.za
Website Instantpot.co.za

Instant Pot DUO NOVA 100

FINALIST

Large AC Power

SPECIFICATIONS

Capacity (L)	9.5
Nominal Voltage & Frequency (V / Hz)	120 Vac / 60 Hz*
*220-240V / 50Hz also available	



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	655.2
	Average Power Draw (W)	1355.3
	Thermal Efficiency (from 30-90°C)	82.9%
	Temperature: Max (°C)	108.3
	Time to Reach Pressure Cooking Phase (min:sec)	29:28
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	50.7
	Average Power Draw (W)	101.3
	Temperature: Max / Min / Ave (°C)	108.3 / 105.5 / 106.6
	Pressure: Max / Min / Ave (kPa)	51 / 39 / 43.3
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	294.0
	Average Power Draw (W)	588.1
	Temperature: Max / Min / Ave (°C)	0 / 0 / 161
	Temperature Stability (% time in ideal range)	99
	Time to Reach Sauté Temperature (min:sec)	10:16
Affordability	Unit Price (\$-\$\$\$\$)	\$\$\$\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$72.99

Instant Pot

Company Spindel (PTY) LTD
 Sales Contact Paul Dimaio
 Phone + 27832330518
 Email info@instantpot.co.za
 Website Instantpot.co.za

BURN MY-8001

Large AC Power

FINALIST



SPECIFICATIONS

Capacity (L)	8
Nominal Voltage & Frequency (V / Hz)	230 Vac / 50 Hz



TEST RESULTS

Heating Phase	Total Energy Consumption (Wh)	567.9
	Average Power Draw (W)	1193.8
	Thermal Efficiency (from 30-90°C)	77.7%
	Temperature: Max (°C)	116.0
	Time to Reach Pressure Cooking Phase (min:sec)	30:24
Pressure Cooking	Total Energy Consumption (for 30 min; Wh)	35.9
	Average Power Draw (W)	71.8
	Temperature: Max / Min / Ave (°C)	116 / 109.1 / 111.6
	Pressure: Max / Min / Ave (kPa)	89 / 53.4 / 65.5
Sauté Cooking	Calculated Total Energy Consumption (for 20 min; Wh)	233.1
	Average Power Draw (W)	466.1
	Temperature: Max / Min / Ave (°C)	159.2 / 124.3 / 150.5
	Temperature Stability (% time in ideal range)	94
	Time to Reach Sauté Temperature (min:sec)	07:24
Affordability	Unit Price (\$-\$\$\$\$)	\$
	Estimated Annual Operating Cost (at USD\$0.20/kWh)	\$61.09



Affordability Prize Winner

Company	BURN Manufacturing
Sales Contact	Rebecca Wentworth
Phone	+ 254742642811
Email	rebecca.wentworth@burnmfg.com
Website	Burnstoves.com



www.globalLEAPawards.org



info@globalLEAPawards.org



[@LEAP_Awards](https://twitter.com/LEAP_Awards)



ACKNOWLEDGEMENTS

Global LEAP extends its thanks to the companies that participated in the 2020 Global LEAP Awards Electric Pressure Cooker Competition. Global LEAP would also like to extend a special thanks to the market and technical experts who served as Expert Judges for the competition, including: Philip Mann (UK's Foreign, Commonwealth & Development Office), Simon Batchelor (Modern Energy Cooking Services), Yabei Zhang (World Bank Energy Sector Management Assistance Program), Shveta Sarin (Shell Foundation), Boston Nyer (D-Rev), Erick Mgonda (A2EI), Megan Bomba (NexLeaf), Agnes Naluwagga (Centre for Research in Energy and Energy Conservation), Godfrey Sanga (Energy 4 Impact), and Anne Wacera Wambugu (Strathmore University).



CLASP serves as Administrator of the Global LEAP Awards and other Global LEAP initiatives.